


Product Details

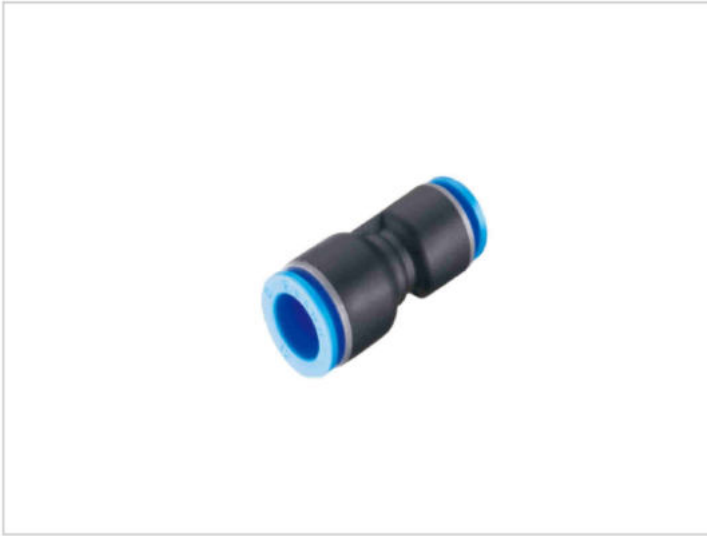

Name: EPG/APG

产品特点/Characteristics

- 1.Quick installation,simple and flexible,space-saving.
- 2.The tube fitting comes in a wide variety of models to meet all your needs in pneumatic piping.
- 3.Even after installatipn,the direction of tubing can be changed freely.
- 4.The release ring adopts the ellipse design to make it more convenient and labor-saving for disconnection.
- 5.All taper pipe threads are pre-coated with Teflon with fine seal performance.
- 6.All fittings are equipped with the internal hexagonal holes.It is easy for them to be mounted in the narrow places.

技术参数/Specification

Fluid	Air,vacuum
Pressure Range	0~1.0MPa
Negative pressure	-100KPa(10Torr)
Max Pressure	1.5MPa
Temperature Rang	-15°C~80°C
Applicable Tube	Nylon(PA)Polyurethane(PU)

型号/MODEL	C1	C2	ΦD1	ΦD2	B	X1	Y1	X2	Y2
EPG6-4	15.5	14.4	6	4	31	13.9	12.5	11.9	10.5
EPG8-4	17.8	14.4	8	4	34.5	15.9	13.9	11.9	10.5
EPG8-6	17.8	15.5	8	6	34.6	15.9	13.9	13.9	12.5
EPG10-6	20.5	15.5	10	6	39	19.5	17	13.9	12.5
EPG10-8	20.5	17.8	10	8	39.4	19.5	17	15.9	13.9
EPG12-8	22.6	17.8	12	8	43.8	23	20.5	15.9	13.9
EPG12-10	22.6	20.5	12	10	44.2	23	20.5	19.5	17
EPG16-12	24	22.6	16	12	49.3	27	24	23	20.5

